

# GENERAC<sup>®</sup>

POWER SYSTEMS, INC.

Generac Power Systems, Inc.  
Telephone: (414) 544-4811


P.O. Box 8  
Fax: (414) 544-4851

Waukesha, WI 53187

Errata Sheet: "E" Option Control Module Description  
Manual Part Number: A7605

## The following instructions are necessary to alter the serial communications setup on your unit:

The "E" option control module is capable of being used with either a modem or a remote annunciator/remote relay panel, depending on the configuration of the serial connections. The unit comes set up for connection to a modem. In order to use the control module with a remote annunciator/remote relay panel, follow the diagram and instructions printed below.

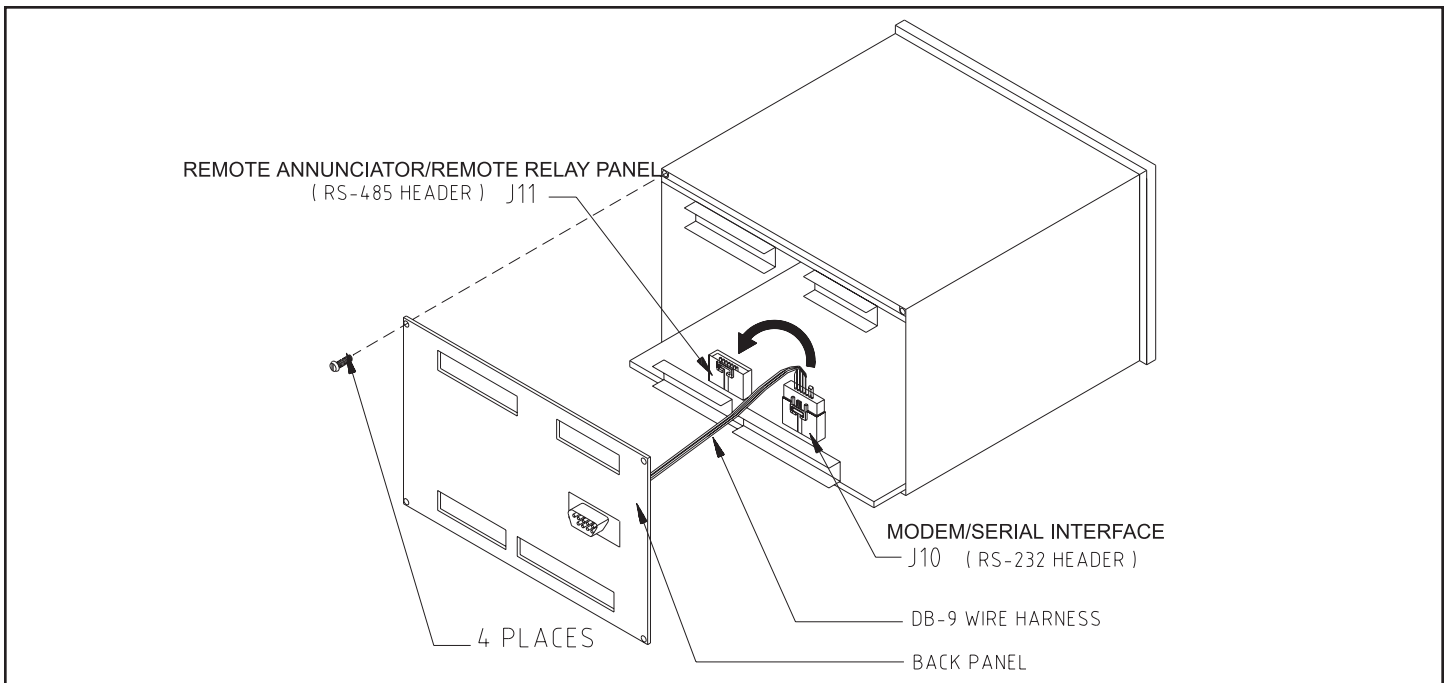

## INSTRUCTIONS:

1. Unplug all four wire harnesses from the back of the "E"-panel control box.
2. Remove the four screws from the back panel of the control box.
3. Open the back of the control box.
4. Locate the DB-9 wire harness that runs from the DB-9 connector on the back panel to the black header on the lower circuit board inside the controller box.
5. Carefully remove the black connector from the header by pressing the locking tab and lifting up.
6. Insert the black connector into the RS485 header (J11). Make sure that the connector is fully inserted and that the locking tab snaps into place.
7. Replace the back panel and the four screws.

Please keep this sheet for future reference.

P/N C2811  
6/2/99