


20 Light Programmable Remote Annunciator

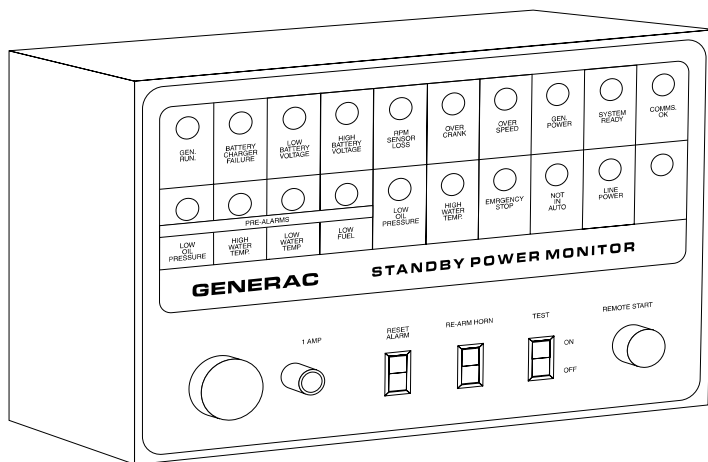

- For use with the Generac Automatic Transfer Switch and a D/E generator control panel.
- Solid-state LED lamps.
- Available in flush and surface mount configurations.
- Built-in alarm with silence switch.
- Conforms to NFPA requirements for essential electrical systems for health care facilities.
- Complies with NFPA-110 and NFPA-99.
- 12/24 Volt DC input.
- Generator remote start capabilities.

Continuous Monitoring

When the Generac 20 Light Remote Annunciator is used to remotely monitor the standby generator set, it will provide enough information at a glance to avoid unnecessary maintenance trips.

Four pre-alarms are included for High Water Temperature (above 220°F), Low Water Temperature (below 70°F), Low Fuel, and Low Oil Pressure (18 - 20 PSI) that will indicate an impending critical situation. The High Water Temperature/Low Coolant Level and Low Oil Pressure shutdown alarms will be activated only after the pre-alarms have. High and Low Battery Voltage indicators operate from the battery's voltage sensing board. Overspeed indicates an engine overspeed condition, and Overcrank signals that the starter has completed its cycle crank and the engine has not started. Sensor Loss indicates a problem in the engine speed monitoring system.

Generator Power indicates that the transfer switch is in the emergency position. The Line Power light means the transfer switch is in the utility position. System Ready is constant providing the generator is set to 'Auto', battery power is present and no alarms are on. The Not In Auto light informs you that the unit is not aligned for automatic operation. Re-arm Horn will silence the audible alarm but not reset the lamp. Any subsequent alarms will activate the horn. The alarm on/off switch will silence the alarm.


The Communication OK light is on as long as there is proper communication between the RAP and the D/E panel.

For additional information on other communication configurations, see Generac Bulletin #0165660SBY — 20 Light Remote Annunciator Model Comparison.

GENERAC[®]
POWER SYSTEMS, INC.

Specifications

Dimensions (inches)

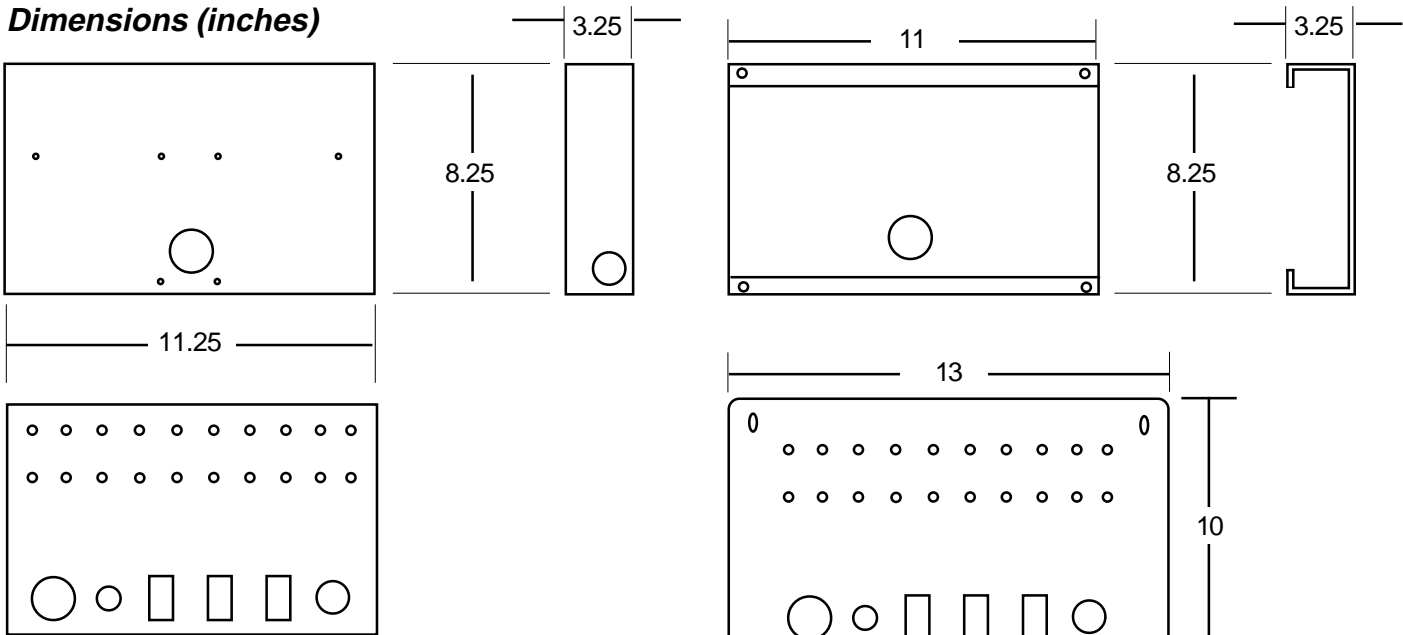

Surface mount, Model 984-0

Flush mount, Model 985-0

Annunciator Light	Light Color	Audible Alarm	Latched	Annunciator Light	Light Color	Audible Alarm	Latched
Generator Run	Yellow	No	No	Pre-Low Oil Pressure	Yellow	Yes	Yes
Battery Charger AC Fail.	Yellow	Yes	No	Pre-High Water Temp	Yellow	Yes	Yes
Low Battery Voltage	Yellow	Yes	No	Pre-Low Water Temp	Yellow	Yes	Yes
High Battery Voltage	Yellow	No	No	Pre-Low Fuel	Yellow	Yes	Yes
RPM Sensor Loss	Red	Yes	N/A	Low Oil Pressure	Red	Yes	N/A
Overcrank	Red	Yes	N/A	High Water Temp	Red	Yes	N/A
Overspeed	Red	Yes	N/A	Emergency Stop	Red	Yes	N/A
Generator Power	Yellow	No	No	Not in Auto	Red	Yes	No
System Ready	Green	No	N/A	Line Power	Green	No	N/A
Communication OK	Green	Yes	N/A	Spare	Green	No	N/A

GENERAC POWER SYSTEMS, INC. • P.O. BOX 8 • WAUKESHA, WI 53187

262/544-4811 • FAX 262/544-4851